

BADU® EasyFit Eco VS

Universal pump with great genes.
Broad field of application with high flexibility.

Field of application

Swimming pool water circulation through a filter system.
The pump can be installed max. 3 m above or below water level.

Design

Monoblock-type pump with integrated strainer tank.
The bellows-type mechanical seal is mounted on a plastic shaft protector sleeve. Motor/pump shaft has no contact with the pool water providing complete electrical separation.
Strainer tank capacity approx. 3 l
Strainer basket mesh size approx. 3.2 x 2.6 mm

For connection variations please see pages 42-43.
Can be controlled using the BADU Eco Logic remote control.
See page 132.

Materials used

Pump casing PP GF 30
Intermediate housing PP GF 30
Gland housing PP TV 40
Diffuser PA 66 GF 30/PP GF 30
Impeller PP GF 30
Strainer basket PP
Lid PC, transparent/PP GF 30
Glue sockets ABS
Mechanical seal carbon/ceramic/NBR
Screws stainless steel
Elastomers NBR/viton

Technical data at 50/60 Hz	BADU EasyFit Eco VS	
Inlet Sa/outlet connection Da d ⁴⁾		63/63
Rec. inlet/outlet pipe, PVC pipe, d ⁴⁾		63/63
Power input P ₁ /output P ₂ ¹⁾ (kW)	1~ 230 V	0.03-1.40/0.01-1.10
Rated current (A)	1~ 230 V	0.50-6.10
Net weight (kg)	1~	11.50

For more detailed information regarding the motor protection please see page 167.

Article no	Description	Voltage	Power output P ₂
207.6261.138	BADU EasyFit Eco VS	1~ 230 V	1.10 kW

Universal opening device included in delivery. See page 154.




< Motor display with intuitive control



Scan the QR code for the BADU EasyFit product video...



Performance

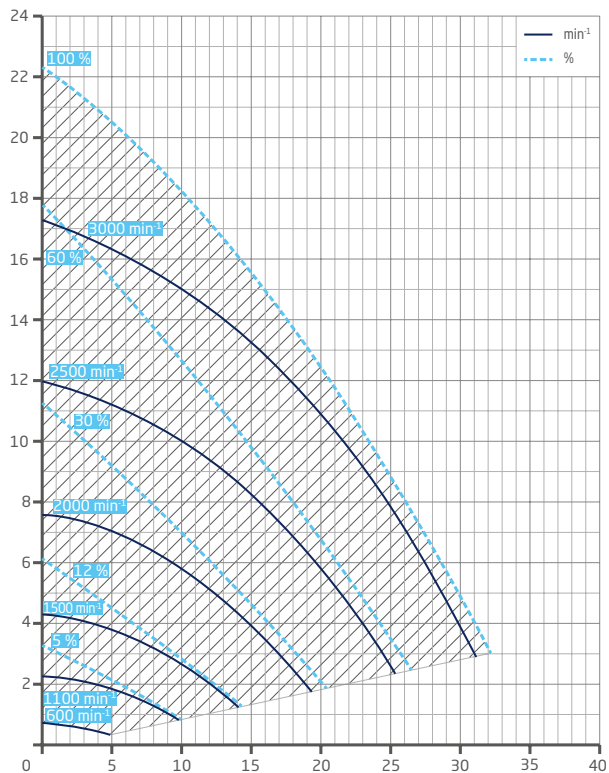

Total dynamic head H (m) / Flow rate Q (m³/h) >

Dimensions

Detailed dimensions available on request or at badu.de

